




Flex Wing Tandem Disc Harrows

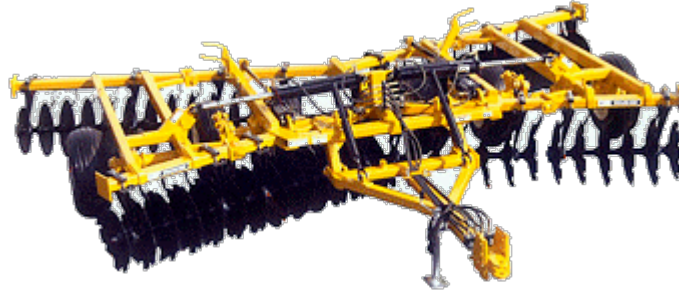

The Taylor-Way flex wing design delivers excellent cutting and superior leveling ability resulting in a "Taylor Made" finish. When it comes to quality craftsmanship at a price you can afford there is no better choice than the Taylor-Way Series 580 Flex Wing Tandem Disc Harrow. Trust the Taylor-Way Series 580 to make your job easy, providing excellent reliability in an implement made to last.

Features

- 3" x 5" tubular frame
- (2) 4" x 8" transport cylinders
- (2) 4" x 24" wing cylinders
- 8" or 9" disc spacing
- Spring or rigid bearing connectors
- Disc scrapers
- 22" cut-out or round discs
- Hydraulic hoses
- Sealed self-aligning regreaseable ball bearings
- Single/double reversible drawbar clevis
- 1 1/8 square axle
- 11L x 15" 8 ply tires mounted on 15" x 10" rims
- Optional 1" x 2" flexible steel hanger design to absorb shock load

	580 Series
Cutting Width Range	17' 5" to 25' 0"
Avg. Weight per Blade	134 lbs
Transport Width	12' 9"
Disc Spacing	8", 9" or combo
Blade Diameter	22"
Blade Thickness	6 gauge
Transport Cylinder/Hoses	4" x 8"
Wing Cylinders	4" x 24"
Tongue Jack	5000 lb standard