




Rotary Tillers

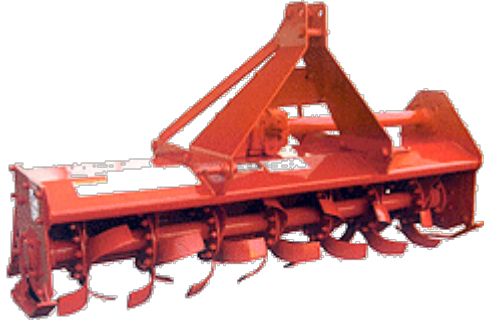

Perfect for farmers, vegetable growers, municipal maintenance, landscape contractors, nurseries and much more

- Taylor-Way Gear-Driven Rotary Tillers have a rugged, reinforced main frame for years of dependable service.
- The heavy duty gear drive operates in an oil bath for dependable performance and reduced maintenance.
- 6-tines per flange require less horsepower yet operate smoothly, especially in tough conditions.
- Standard slip clutch 540 rpm drive line provides protection for drive components.
- Tilling depth controlled by adjustable skid shoes - to maximum 8" depth.
- Standard heavy-duty rear deflector provides improved leveling and soil finish.
- Recommended for tractors up to 50 hp.

	962 Series		
Working Width	48"	60"	72"
Tilling Depth	8"	8"	8"
Drive Type	Gear Driven in Oil		
Number of Flanges	6	7	9
Number of Blades	36	42	54
Machine Weight	600 lbs	690 lbs	780 lbs
Tractor HP Range	20-35 hp	25-40 hp	32-50 hp